

HIGH-FREQUENCY LOW-NOISE AMPLIFIER NPN SILICON EPITAXIAL TWIN TRANSISTOR (WITH BUILT-IN 6-PIN 2 × 2SC4226) THIN-TYPE SMALL MINI MOLD

The μ PA821TF has 2 built-in low-voltage transistors which are designed for low-noise amplification in the VHF to UHF band.

FEATURES

- Low-noise
NF = 1.2 dB/TYP. @ f = 1 GHz, $V_{CE} = 3V$, $I_c = 7mA$
- High gain
 $IS_{21eI^2} = 9.0$ dB/TYP. @ f = 1 GHz, $V_{CE} = 3V$, $I_c = 7mA$
- 6-pin thin-type small mini mold package adopted
- Built-in 2 transistors (2 × 2SC4226)

ORDERING INFORMATION

Part Number	Quantity	Packing Style
μ PA821TF	Loose products (50 pcs)	Embossed tape 8 mm wide. Pin 6 (Q1 Base), Pin 5 (Q2 Emitter), Pin 4 (Q2 Base) face to perforation side of the tape.
μ PA821TF-T1	Taping products (3 kpcs/reel)	

Remark If you require an evaluation sample, please contact an NEC Sales Representative (unit sample quantity is 50 pcs).


ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ C$)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	20	V
Collector to Emitter Voltage	V_{CEO}	12	V
Emitter to Base Voltage	V_{EBO}	3	V
Collector Current	I_c	100	mA
Total Power Dissipation	P_T	150 in 1 element 200 in 2 elements ^{Note}	mW
Junction Temperature	T_j	150	$^\circ C$
Storage Temperature	T_{stg}	-65 to 150	$^\circ C$


Note 110 mW must not be exceeded for 1 element.

Caution is required concerning excess input, such as from static electricity, due to the high-precision fabrication processes used for this device.

PACKAGE DRAWINGS (Unit: mm)

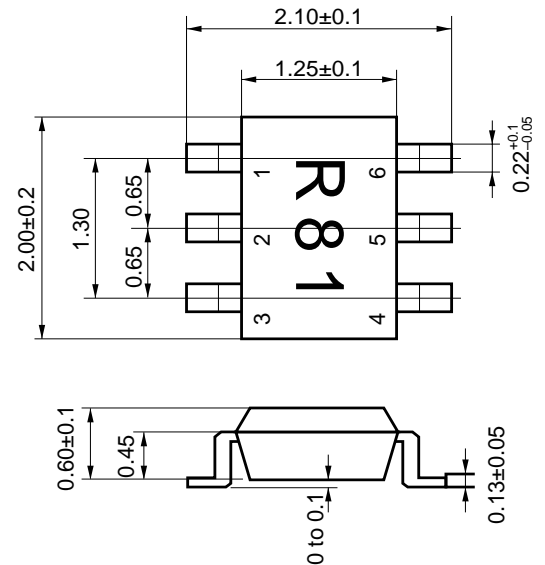

PIN CONFIGURATION (Top View)

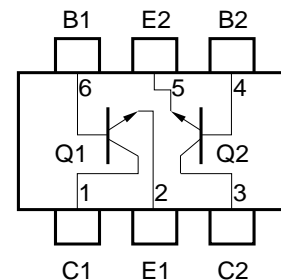

PIN CONNECTIONS

- | | |
|-------------------|-----------------|
| 1. Collector (Q1) | 4. Base (Q2) |
| 2. Emitter (Q1) | 5. Emitter (Q2) |
| 3. Collector (Q2) | 6. Base (Q1) |

ELECTRICAL CHARACTERISTICS (T_A = 25°C)

Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Collector Cutoff Current	I _{CB0}	V _{CB} = 10 V, I _E = 0			1.0	μA
Emitter Cutoff Current	I _{EB0}	V _{EB} = 1 V, I _C = 0			1.0	μA
DC Current Gain	h _{FE}	V _{CE} = 3 V, I _C = 7 mA ^{Note 1}	70		140	
Gain Bandwidth Product	f _T	V _{CE} = 3 V, I _C = 7 mA	3.0	4.5		GHz
Feedback Capacitance	C _{re}	V _{CB} = 3 V, I _E = 0, f = 1 MHz ^{Note 2}		0.7	1.5	pF
Insertion Power Gain	S _{21e} ²	V _{CE} = 3 V, I _C = 7 mA, f = 1 GHz	7	9		dB
Noise Figure	NF	V _{CE} = 3 V, I _C = 7 mA, f = 1 GHz		1.2	2.5	dB
h _{FE} Ratio	h _{FE1} /h _{FE2}	V _{CE} = 3 V, I _C = 7 mA h _{FE1} = Smaller h _{FE} value among Q1 and Q2 h _{FE2} = Larger h _{FE} value among Q1 and Q2	0.85			





Notes 1. Pulse measurement P_w ≤ 350 μs, Duty cycle ≤ 2 %






2. Capacitance between collector and base measured with a capacitance meter (auto-balancing bridge method). Emitter should be connected to the guard pin of capacitance meter.

h_{FE} CLASSIFICATION

Rank	FB
Marking	R81
h _{FE} value	70 to 140

TYPICAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$)

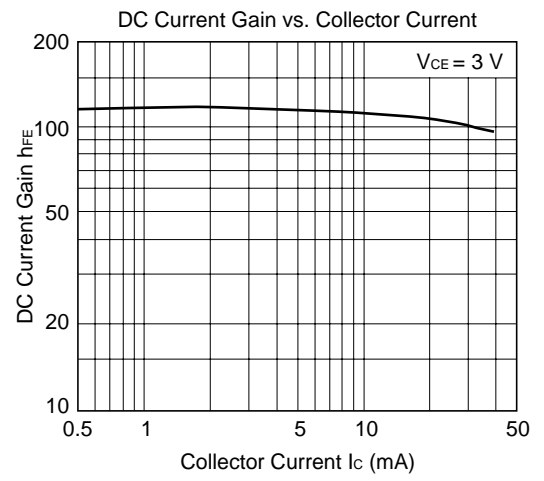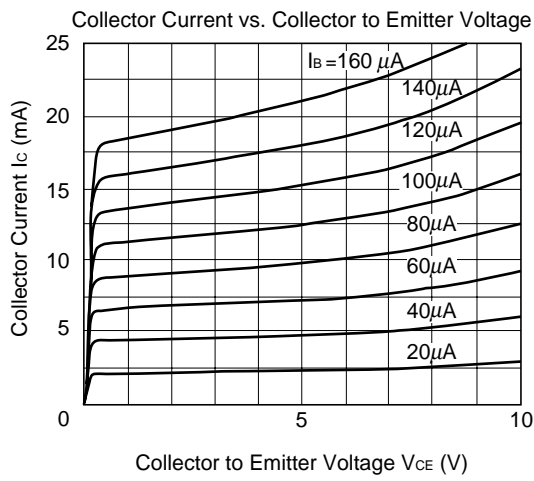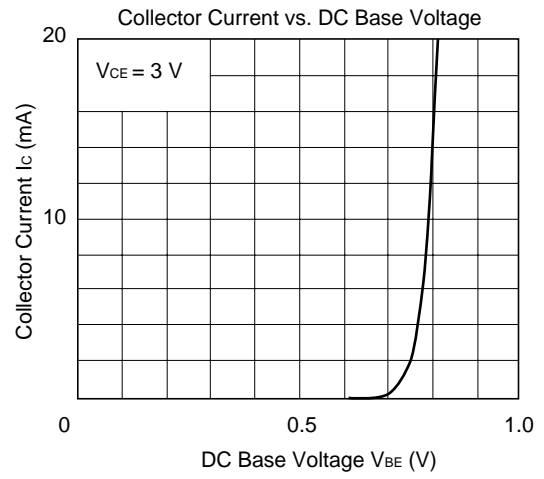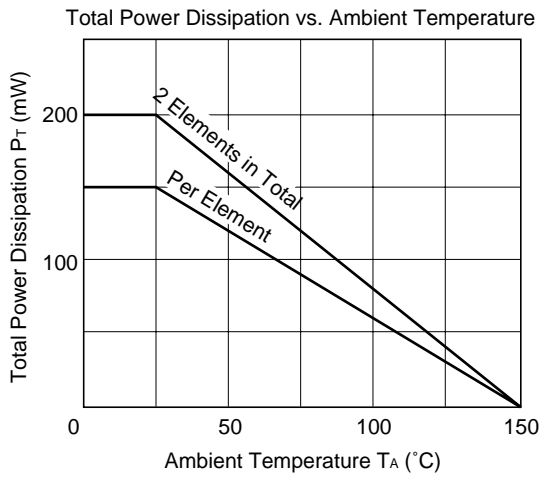

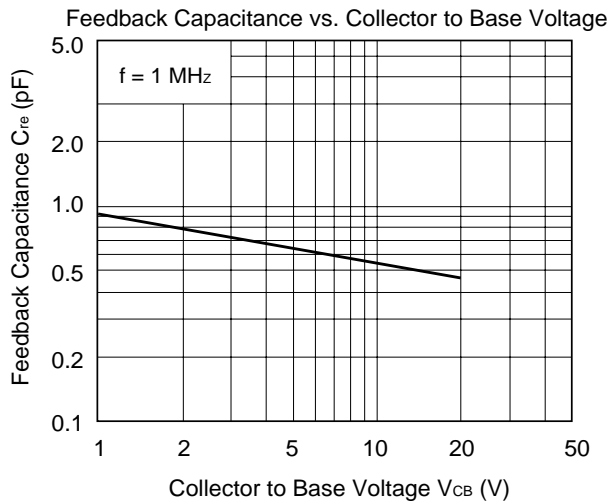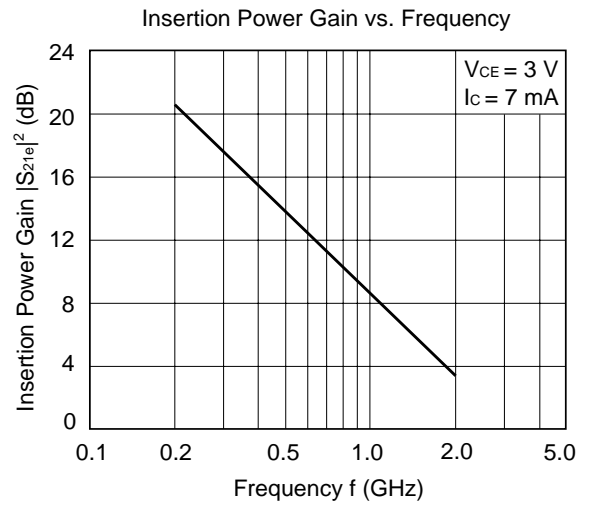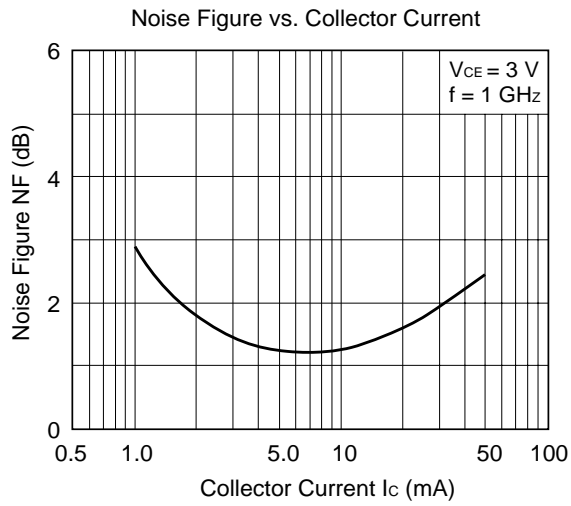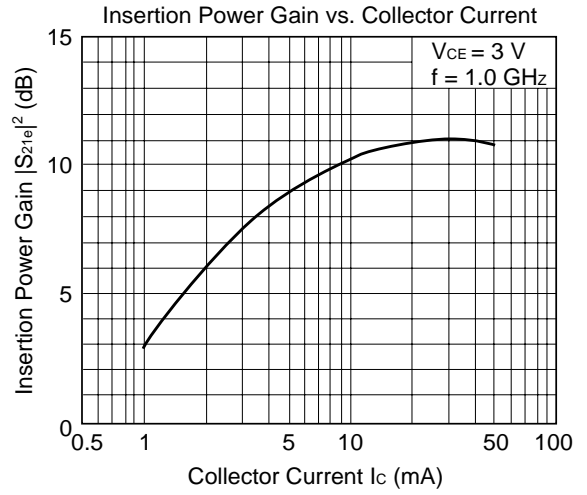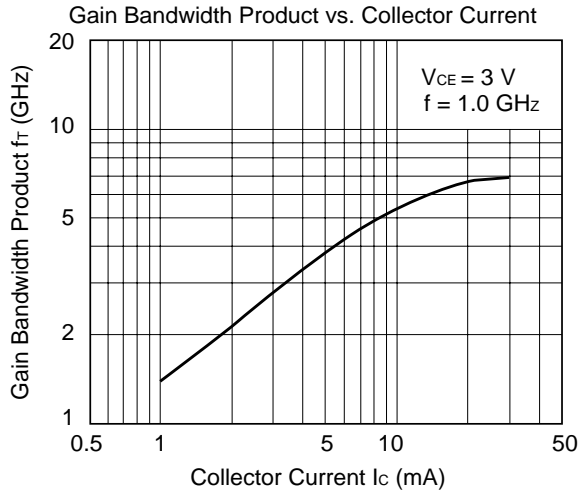

S PARAMETER Q1

V_{CE} = 3 V, I_c = 1 mA, Z₀ = 50 Ω

FREQUENCY GHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
.10	.97	-20.45	2.38	162.85	.04	76.56	.98	-8.59
.20	.94	-40.17	2.31	148.19	.08	63.82	.94	-16.05
.30	.90	-59.57	2.25	135.26	.11	52.97	.89	-22.20
.40	.86	-77.29	2.10	123.99	.13	43.63	.83	-27.30
.50	.82	-94.54	2.03	113.53	.15	36.13	.78	-31.16
.60	.79	-110.15	1.92	104.19	.16	29.28	.74	-34.67
.70	.76	-124.06	1.80	95.54	.16	23.65	.70	-37.55
.80	.74	-136.61	1.69	87.82	.16	19.18	.67	-40.06
.90	.72	-148.19	1.59	80.80	.16	15.47	.65	-42.54
1.00	.71	-158.16	1.48	74.49	.16	12.65	.64	-44.88
1.10	.71	-167.38	1.39	68.76	.15	10.12	.62	-47.25
1.20	.70	-175.72	1.30	63.28	.15	8.37	.61	-49.79
1.30	.71	176.48	1.22	58.43	.14	7.41	.60	-52.21
1.40	.71	169.61	1.15	53.77	.13	7.31	.59	-54.99
1.50	.71	162.88	1.09	49.18	.13	7.58	.59	-57.73
1.60	.72	157.03	1.03	45.04	.12	9.20	.58	-61.04
1.70	.72	151.31	.97	41.14	.12	11.56	.58	-64.34
1.80	.73	146.29	.92	37.65	.11	14.82	.58	-67.77
1.90	.74	141.40	.87	34.21	.11	18.79	.57	-71.13
2.00	.75	136.95	.83	31.08	.11	23.61	.57	-74.83
2.10	.75	132.61	.79	27.91	.11	28.60	.57	-78.77
2.20	.76	128.64	.76	25.12	.11	33.65	.57	-82.60
2.30	.77	124.97	.72	22.56	.12	38.01	.57	-86.85
2.40	.77	121.29	.69	20.26	.12	41.76	.57	-90.91
2.50	.78	117.97	.66	18.15	.13	45.08	.57	-95.23
2.60	.79	114.71	.63	16.20	.14	47.62	.57	-99.78
2.70	.79	111.76	.60	14.55	.15	49.09	.57	-104.24
2.80	.80	108.85	.58	12.80	.16	49.98	.58	-109.00
2.90	.81	106.05	.56	11.46	.18	50.29	.58	-113.69
3.00	.81	103.52	.54	10.02	.19	50.48	.58	-118.13

S PARAMETER Q1

$V_{CE} = 3\text{ V}$, $I_c = 3\text{ mA}$, $Z_0 = 50\ \Omega$

FREQUENCY GHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
.10	.90	-29.42	6.73	156.08	.04	70.94	.93	-16.82
.20	.83	-56.61	6.15	138.83	.07	55.92	.82	-29.40
.30	.75	-82.38	5.66	124.38	.09	46.12	.70	-37.28
.40	.70	-104.35	5.08	112.82	.10	39.45	.61	-42.73
.50	.65	-122.97	4.52	102.90	.11	35.38	.54	-45.93
.60	.62	-138.09	4.00	94.98	.11	32.50	.49	-48.61
.70	.60	-150.60	3.57	88.01	.11	30.78	.45	-50.55
.80	.59	-161.35	3.21	82.00	.11	30.02	.42	-52.19
.90	.59	-170.46	2.90	76.74	.12	29.88	.40	-54.08
1.00	.59	-178.60	2.65	71.87	.12	30.03	.38	-55.78
1.10	.59	174.04	2.43	67.34	.12	30.52	.37	-57.60
1.20	.59	167.50	2.25	62.99	.12	31.42	.36	-59.72
1.30	.60	161.38	2.08	59.07	.12	32.31	.35	-61.84
1.40	.60	156.04	1.95	55.38	.13	33.59	.34	-64.46
1.50	.61	150.72	1.82	51.53	.13	34.65	.33	-67.05
1.60	.62	146.09	1.71	48.04	.13	35.76	.33	-70.23
1.70	.63	141.52	1.61	44.61	.14	36.98	.32	-73.46
1.80	.64	137.65	1.53	41.49	.14	38.11	.32	-76.96
1.90	.65	133.69	1.45	38.35	.15	38.91	.32	-80.43
2.00	.66	130.09	1.38	35.44	.15	39.97	.31	-84.11
2.10	.67	126.52	1.32	32.33	.16	40.67	.31	-88.21
2.20	.68	123.26	1.26	29.70	.16	41.25	.31	-92.12
2.30	.69	120.27	1.20	26.91	.17	41.76	.31	-96.67
2.40	.69	117.15	1.15	24.44	.18	42.09	.31	-100.78
2.50	.70	114.27	1.10	21.83	.19	42.08	.31	-105.22
2.60	.71	111.71	1.06	19.60	.19	42.18	.31	-109.89
2.70	.72	109.21	1.02	17.12	.20	42.29	.32	-114.66
2.80	.73	106.70	.97	14.96	.21	41.78	.32	-119.25
2.90	.74	104.47	.94	12.97	.22	41.42	.33	-124.21
3.00	.75	102.28	.91	10.82	.22	41.10	.33	-128.59

S PARAMETER Q1

$V_{CE} = 3\text{ V}$, $I_c = 5\text{ mA}$, $Z_0 = 50\ \Omega$

FREQUENCY GHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
.10	.84	-37.26	10.52	150.99	.04	67.19	.89	-23.52
.20	.74	-70.72	9.17	131.67	.06	52.38	.72	-38.66
.30	.65	-100.14	7.97	116.47	.07	44.81	.58	-46.62
.40	.60	-122.73	6.76	105.34	.08	41.17	.48	-51.47
.50	.57	-139.98	5.74	96.73	.09	39.62	.42	-54.25
.60	.55	-153.16	4.95	89.92	.09	38.83	.37	-56.48
.70	.54	-163.95	4.33	84.13	.10	38.89	.34	-58.22
.80	.54	-173.01	3.85	78.92	.10	39.22	.31	-59.93
.90	.54	179.14	3.44	74.44	.11	40.21	.30	-61.82
1.00	.54	172.20	3.13	70.19	.11	40.98	.28	-63.63
1.10	.55	165.80	2.86	66.20	.12	41.45	.27	-65.68
1.20	.55	160.12	2.63	62.35	.12	42.12	.26	-68.02
1.30	.56	154.92	2.43	58.82	.13	42.51	.25	-70.57
1.40	.57	150.12	2.27	55.44	.13	43.29	.24	-73.51
1.50	.58	145.43	2.12	51.94	.14	43.44	.23	-76.52
1.60	.59	141.31	1.99	48.73	.15	43.67	.23	-80.31
1.70	.60	137.23	1.88	45.70	.15	44.06	.22	-84.21
1.80	.61	133.70	1.78	42.72	.16	44.00	.22	-88.16
1.90	.62	130.17	1.68	39.69	.16	43.77	.22	-92.09
2.00	.63	126.82	1.60	37.07	.17	43.80	.22	-96.22
2.10	.64	123.64	1.53	34.06	.18	43.62	.22	-101.16
2.20	.65	120.71	1.46	31.55	.18	43.25	.22	-105.74
2.30	.66	117.99	1.40	28.81	.19	42.92	.22	-110.57
2.40	.67	115.08	1.33	26.41	.20	42.38	.22	-115.34
2.50	.68	112.54	1.28	23.75	.21	41.92	.22	-120.22
2.60	.68	110.13	1.23	21.72	.21	41.46	.22	-125.18
2.70	.69	107.78	1.18	19.41	.22	40.69	.23	-130.36
2.80	.70	105.52	1.14	17.04	.23	39.95	.24	-134.71
2.90	.71	103.31	1.10	15.04	.23	39.10	.24	-139.65
3.00	.72	101.25	1.06	12.85	.24	38.40	.25	-144.01

S PARAMETER Q1

V_{CE} = 3 V, I_c = 7 mA, Z₀ = 50 Ω

FREQUENCY GHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
.10	.79	-44.32	13.71	146.95	.04	64.19	.84	-28.71
.20	.67	-82.73	11.45	126.15	.05	50.70	.64	-44.98
.30	.59	-113.49	9.41	111.03	.07	45.71	.49	-52.71
.40	.55	-134.72	7.67	100.87	.07	44.09	.40	-57.18
.50	.52	-150.16	6.37	93.24	.08	43.89	.35	-59.82
.60	.52	-161.98	5.44	87.20	.08	44.29	.31	-62.08
.70	.51	-171.56	4.71	81.95	.09	44.90	.28	-63.86
.80	.51	-179.64	4.17	77.28	.10	45.68	.26	-65.85
.90	.52	173.30	3.73	73.14	.10	46.53	.24	-67.95
1.00	.52	167.06	3.38	69.28	.11	47.24	.23	-70.01
1.10	.53	161.26	3.08	65.48	.12	47.44	.22	-72.42
1.20	.54	156.05	2.83	61.95	.12	47.51	.21	-75.34
1.30	.54	151.22	2.61	58.77	.13	47.41	.20	-78.33
1.40	.55	146.81	2.44	55.41	.14	47.76	.19	-81.85
1.50	.56	142.49	2.28	52.20	.14	47.48	.19	-85.78
1.60	.57	138.66	2.14	49.11	.15	47.27	.18	-90.06
1.70	.58	134.85	2.02	46.08	.16	47.00	.18	-94.72
1.80	.59	131.54	1.91	43.25	.17	46.66	.18	-99.13
1.90	.60	128.16	1.81	40.43	.17	45.91	.18	-103.95
2.00	.61	125.10	1.72	37.91	.18	45.50	.18	-108.59
2.10	.62	122.05	1.64	34.92	.19	44.78	.18	-114.11
2.20	.63	119.27	1.57	32.41	.20	44.24	.18	-118.98
2.30	.64	116.70	1.50	29.76	.20	43.38	.18	-124.21
2.40	.65	113.87	1.43	27.41	.21	42.59	.18	-129.50
2.50	.66	111.51	1.37	25.17	.22	41.98	.19	-134.34
2.60	.67	109.16	1.32	22.83	.22	41.02	.19	-139.54
2.70	.68	106.97	1.27	20.70	.23	40.16	.20	-144.26
2.80	.69	104.65	1.22	18.35	.24	39.22	.21	-148.76
2.90	.70	102.63	1.18	16.37	.25	38.29	.22	-153.16
3.00	.71	100.68	1.14	14.21	.25	37.45	.23	-157.18

S PARAMETER Q2

V_{CE} = 3 V, I_c = 1 mA, Z₀ = 50 Ω

FREQUENCY GHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
.10	.97	-20.79	2.52	162.21	.04	76.22	.98	-8.81
.20	.93	-40.50	2.43	147.42	.08	63.75	.93	-16.39
.30	.89	-59.73	2.35	134.45	.11	53.38	.87	-22.34
.40	.84	-76.87	2.20	123.37	.13	44.64	.81	-27.24
.50	.80	-93.28	2.11	113.14	.14	38.01	.76	-30.90
.60	.76	-107.72	1.99	104.15	.15	32.06	.71	-34.29
.70	.74	-120.25	1.85	96.02	.16	27.52	.68	-36.96
.80	.71	-131.32	1.74	88.78	.15	24.29	.65	-39.46
.90	.69	-141.35	1.64	82.34	.15	21.95	.62	-41.97
1.00	.68	-150.05	1.53	76.48	.15	20.46	.60	-44.52
1.10	.68	-157.96	1.44	71.18	.15	19.32	.58	-47.14
1.20	.67	-165.04	1.36	66.07	.14	19.44	.57	-50.06
1.30	.67	-171.63	1.29	61.58	.14	20.32	.56	-52.97
1.40	.67	-177.36	1.23	57.26	.13	22.04	.54	-56.38
1.50	.67	176.90	1.17	52.95	.13	24.64	.53	-59.83
1.60	.67	171.98	1.11	49.02	.13	27.93	.52	-63.99
1.70	.68	166.97	1.06	45.23	.13	32.01	.51	-68.26
1.80	.68	162.82	1.02	41.90	.13	35.88	.50	-72.94
1.90	.69	158.53	.98	38.32	.13	39.86	.49	-77.61
2.00	.69	154.69	.94	35.40	.14	44.56	.48	-82.95
2.10	.70	150.93	.91	32.13	.15	48.10	.47	-88.66
2.20	.70	147.32	.88	29.30	.16	51.51	.46	-94.50
2.30	.71	144.13	.84	26.66	.17	53.73	.46	-100.96
2.40	.72	140.81	.81	24.15	.19	54.94	.45	-107.69
2.50	.72	137.73	.79	21.71	.21	55.71	.45	-114.70
2.60	.73	134.85	.76	19.47	.23	55.82	.45	-122.04
2.70	.73	132.23	.74	17.56	.24	55.39	.45	-129.51
2.80	.74	129.37	.72	15.32	.26	54.32	.45	-137.20
2.90	.75	126.78	.69	13.76	.28	53.05	.45	-144.79
3.00	.75	124.46	.68	11.96	.30	51.65	.46	-152.23

S PARAMETER Q2

$V_{CE} = 3\text{ V}$, $I_c = 3\text{ mA}$, $Z_0 = 50\ \Omega$

FREQUENCY GHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
.10	.90	-29.30	6.71	155.29	.04	71.05	.93	-16.80
.20	.82	-56.11	6.09	137.78	.07	56.98	.81	-28.76
.30	.73	-80.85	5.56	123.40	.09	48.29	.68	-35.65
.40	.67	-101.56	4.95	111.97	.10	42.87	.59	-40.13
.50	.62	-118.49	4.38	102.51	.11	39.94	.52	-42.64
.60	.59	-131.80	3.86	94.93	.11	38.27	.47	-44.51
.70	.57	-142.87	3.44	88.40	.11	37.56	.43	-45.87
.80	.56	-152.14	3.11	82.68	.12	37.77	.40	-47.30
.90	.55	-159.99	2.82	77.69	.12	38.47	.38	-48.65
1.00	.54	-166.88	2.59	73.06	.13	39.41	.36	-50.22
1.10	.54	-173.10	2.39	68.79	.13	40.39	.34	-51.85
1.20	.55	-178.59	2.21	64.68	.13	41.56	.32	-54.00
1.30	.55	176.42	2.07	61.03	.14	42.83	.31	-56.35
1.40	.55	171.90	1.95	57.31	.15	44.25	.29	-59.16
1.50	.56	167.41	1.84	53.63	.15	45.41	.28	-62.05
1.60	.57	163.59	1.74	50.19	.16	46.21	.26	-66.12
1.70	.57	159.71	1.66	46.97	.17	47.04	.25	-70.04
1.80	.58	156.43	1.58	43.76	.18	47.53	.24	-74.96
1.90	.59	153.08	1.51	40.55	.19	47.85	.23	-79.98
2.00	.60	149.93	1.45	37.59	.19	48.39	.22	-85.71
2.10	.60	146.93	1.40	34.56	.21	48.56	.21	-92.39
2.20	.61	144.08	1.34	31.82	.22	48.55	.20	-99.18
2.30	.62	141.48	1.29	28.94	.23	48.56	.19	-107.58
2.40	.63	138.74	1.25	26.22	.24	48.08	.19	-116.23
2.50	.64	136.23	1.20	23.63	.25	47.57	.19	-125.28
2.60	.65	133.79	1.16	20.97	.26	46.88	.19	-134.70
2.70	.66	131.63	1.13	18.63	.28	46.03	.20	-144.38
2.80	.67	129.33	1.09	16.09	.29	45.03	.20	-153.65
2.90	.68	127.06	1.06	14.06	.30	43.72	.22	-162.12
3.00	.68	125.06	1.02	11.49	.31	42.77	.23	-169.77

S PARAMETER Q2

$V_{CE} = 3\text{ V}$, $I_c = 5\text{ mA}$, $Z_0 = 50\ \Omega$

FREQUENCY GHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
.10	.83	-36.95	10.41	149.93	.04	67.41	.87	-23.15
.20	.72	-69.61	9.00	130.38	.06	54.36	.70	-36.92
.30	.62	-97.36	7.70	115.33	.07	48.48	.56	-43.33
.40	.56	-117.96	6.47	104.59	.08	46.08	.46	-46.73
.50	.53	-133.20	5.47	96.45	.09	45.55	.40	-48.28
.60	.51	-145.02	4.72	89.97	.10	45.75	.35	-49.37
.70	.50	-154.27	4.13	84.56	.10	46.29	.32	-50.23
.80	.49	-162.17	3.68	79.59	.11	47.21	.29	-50.94
.90	.49	-168.79	3.31	75.30	.12	48.13	.27	-51.90
1.00	.49	-174.60	3.02	71.24	.13	48.87	.25	-53.05
1.10	.49	-179.99	2.77	67.35	.13	49.47	.23	-54.36
1.20	.50	175.37	2.56	63.72	.14	49.97	.22	-56.22
1.30	.50	170.99	2.38	60.38	.15	50.55	.20	-58.24
1.40	.51	167.14	2.25	57.00	.16	50.91	.19	-61.34
1.50	.52	163.26	2.11	53.63	.17	50.87	.18	-64.21
1.60	.52	159.95	1.99	50.49	.18	50.85	.16	-68.73
1.70	.53	156.57	1.90	47.43	.19	50.65	.15	-73.44
1.80	.54	153.53	1.80	44.40	.20	50.10	.14	-79.56
1.90	.55	150.58	1.72	41.65	.21	49.55	.12	-86.25
2.00	.56	147.71	1.65	38.70	.22	49.28	.11	-94.06
2.10	.57	144.98	1.59	35.74	.23	48.70	.11	-104.12
2.20	.58	142.44	1.53	32.92	.24	47.88	.10	-114.99
2.30	.59	140.07	1.47	30.23	.25	47.17	.10	-127.57
2.40	.60	137.58	1.41	27.68	.26	46.25	.10	-141.02
2.50	.61	135.31	1.36	25.02	.27	45.44	.11	-153.25
2.60	.62	133.07	1.31	22.56	.28	44.32	.12	-164.94
2.70	.63	131.02	1.28	20.38	.29	43.24	.13	-174.58
2.80	.64	128.83	1.23	17.84	.30	41.94	.14	176.60
2.90	.65	126.81	1.20	15.67	.31	40.75	.16	170.26
3.00	.66	124.98	1.16	13.38	.32	39.42	.18	163.89

S PARAMETER Q2

V_{CE} = 3 V, I_c = 7 mA, Z₀ = 50 Ω

FREQUENCY GHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
.10	.78	-43.98	13.56	145.65	.04	65.30	.83	-28.08
.20	.64	-81.06	11.15	124.63	.05	53.73	.62	-42.31
.30	.55	-109.37	9.00	109.90	.07	50.12	.47	-48.09
.40	.50	-128.61	7.29	100.27	.07	49.49	.39	-50.66
.50	.48	-142.36	6.05	93.07	.08	50.25	.33	-51.72
.60	.47	-152.78	5.16	87.38	.09	50.94	.29	-52.25
.70	.46	-161.04	4.49	82.41	.10	51.76	.26	-52.80
.80	.46	-168.03	3.98	77.92	.11	52.62	.23	-53.35
.90	.46	-173.82	3.57	74.02	.12	53.24	.21	-54.00
1.00	.46	-179.09	3.24	70.24	.13	53.84	.19	-55.03
1.10	.47	176.20	2.97	66.63	.14	53.96	.18	-56.17
1.20	.47	171.98	2.75	63.22	.15	53.97	.16	-58.07
1.30	.48	168.07	2.55	60.08	.16	53.98	.15	-60.12
1.40	.49	164.50	2.40	56.83	.17	53.80	.14	-63.36
1.50	.50	160.99	2.25	53.72	.18	53.24	.12	-66.67
1.60	.50	157.91	2.13	50.70	.19	52.57	.11	-72.24
1.70	.51	154.69	2.02	47.63	.20	52.05	.09	-78.75
1.80	.52	151.94	1.92	44.73	.21	51.25	.08	-87.51
1.90	.53	149.12	1.83	41.86	.22	50.40	.07	-97.71
2.00	.54	146.49	1.75	39.20	.23	49.60	.07	-110.79
2.10	.55	143.89	1.68	36.30	.24	48.74	.06	-127.63
2.20	.56	141.54	1.62	33.80	.25	47.70	.06	-144.64
2.30	.57	139.30	1.55	31.21	.26	46.78	.07	-160.83
2.40	.58	136.93	1.50	28.56	.27	45.56	.08	-175.36
2.50	.59	134.74	1.44	26.11	.28	44.37	.09	174.41
2.60	.60	132.62	1.39	23.72	.29	43.25	.11	166.38
2.70	.61	130.60	1.35	21.44	.30	41.87	.13	159.99
2.80	.62	128.48	1.31	18.83	.31	40.71	.14	154.42
2.90	.63	126.53	1.27	16.82	.32	39.19	.16	150.20
3.00	.64	124.73	1.23	14.52	.33	38.05	.18	146.24

[MEMO]

[MEMO]

[MEMO]

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.

Anti-radioactive design is not implemented in this product.