


# LED DATA SHEET

|               |         |             |                |
|---------------|---------|-------------|----------------|
| Part No.      | LH67030 |             |                |
| Emitted Color | Red     | Len's Color | Color Diffused |

**Features:**

3.92 × 12.1mm Rectangular resin mold type  
 General purpose leads  
 Chip material : GaP

**Package Dimensions:**

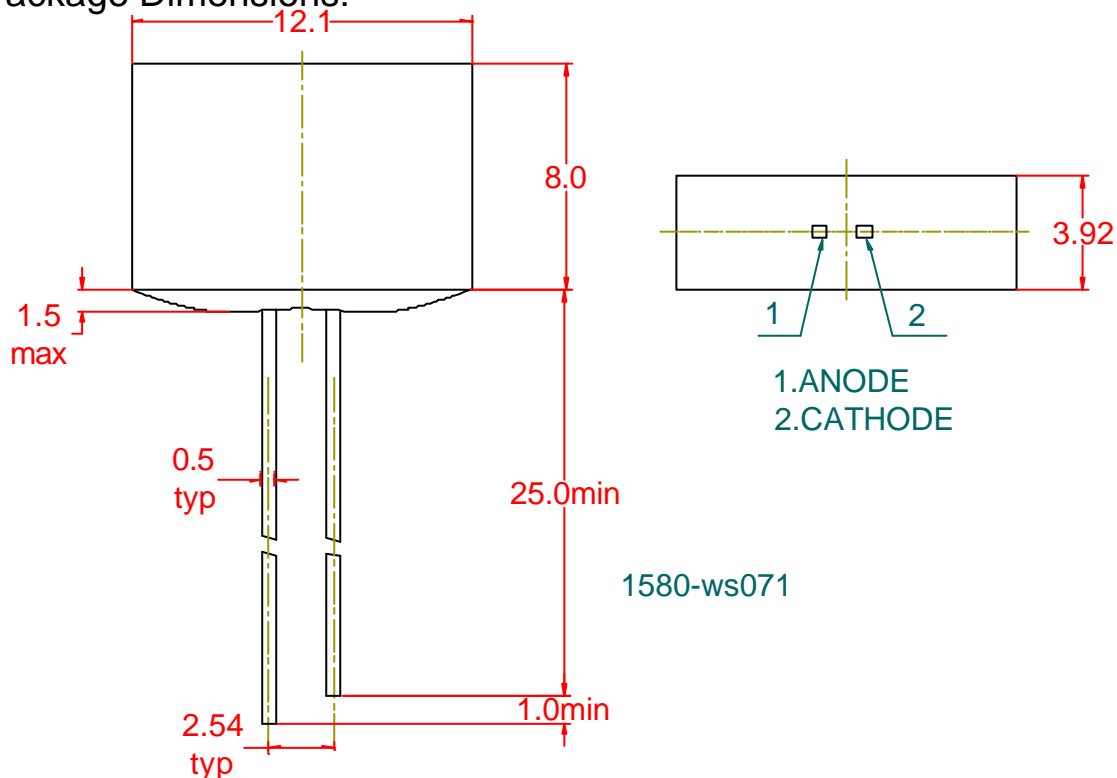

**Note:**

- 1、 All dimensions are in millimetres (mm)
- 2、 Tolerance is  $\pm 0.25\text{mm}$  unless otherwise noted

**Absolute Maximum Rating ( Ta=25 )**

| Parameter   | Symbol    | Max.      | Unit |
|---|-----------|-----------|------|
| Power Dissipation   | $P_M$     | 45        | Mw   |
| Pulse Forward Current (Duty 1/10 @ 1kHz)                  | $I_{FP}$  | 50        | mA   |
| Continuous Forward Current                                | $I_F$     | 15        | mA   |
| Reverse Voltage   | $V_R$     | 6         | V    |
| Operating Temperature Range                               | $T_{opr}$ | -25 ~ 85  |      |
| Storage Temperature Range                                 | $T_{stg}$ | -40 ~ 100 |      |
| Solder Temperature : 2.0mm From Body For 3 Seconds at 260 |           |           |      |

**Electrical Optical Characteristics ( Ta=25 )**

| Parameter                | Symbol          | Min. | Typ. | Max. | Unit    | Test Condition |
|--------------------------|-----------------|------|------|------|---------|----------------|
| Luminous Intensity       | $I_V$           | --   | 0.5  | --   | mcd     | $I_F = 10mA$   |
| Forward Voltage          | $V_F$           | --   | 2.2  | 2.5  | V       | $I_F = 20mA$   |
| Reverse Current          | $I_R$           | --   |      | 50   | $\mu A$ | $V_R = 5V$     |
| Dominant Wavelength      | $\lambda_d$     | --   | 655  | --   | nm      | $I_F = 20mA$   |
| Peak Emission Wavelength | $\lambda_p$     | --   | 690  | --   | nm      | $I_F = 20mA$   |
| Spectral Line Half Width |                 | --   | 60   | --   | nm      | $I_F = 20mA$   |
| Viewing Angle            | $2\theta_{1/2}$ | --   | 100  | --   | Deg.    | $I_F = 20mA$   |

**Note:**

- 1、 The luminous intensity data and  $\lambda_p$  is survey values with the machine JF- 、 JS-2000.
- 2、  $2\theta_{1/2}$  is the clip angle at which the luminous intensity is half the axial luminous intensity.

Typical Characteristic Curves:

