

Radar Pulsed Power Transistor, 90W, 2 μ s Pulse, 10% Duty 3.1 - 3.5 GHz

PH3135-90S


V2.00

Features

- NPN Silicon Microwave Power Transistor
- Common Base Configuration
- Broadband Class C Operation
- High Efficiency Interdigitated Geometry
- Diffused Emitter Ballasting Resistors
- Gold Metalization System
- Internal Input and Output Impedance Matching
- Hermetic Metal/Ceramic Package

Absolute Maximum Ratings at 25°C

Parameter	Symbol	Rating	Units
Collector-Emitter Voltage	V_{CES}	65	V
Emitter-Base Voltage	V_{EBO}	3.0	V
Collector Current (Peak)	I_C	10.7	A
Total Power Dissipation	P_{TOT}	580	W
Junction Temperature	T_J	200	°C
Storage Temperature	T_{STG}	-65 to +200	°C

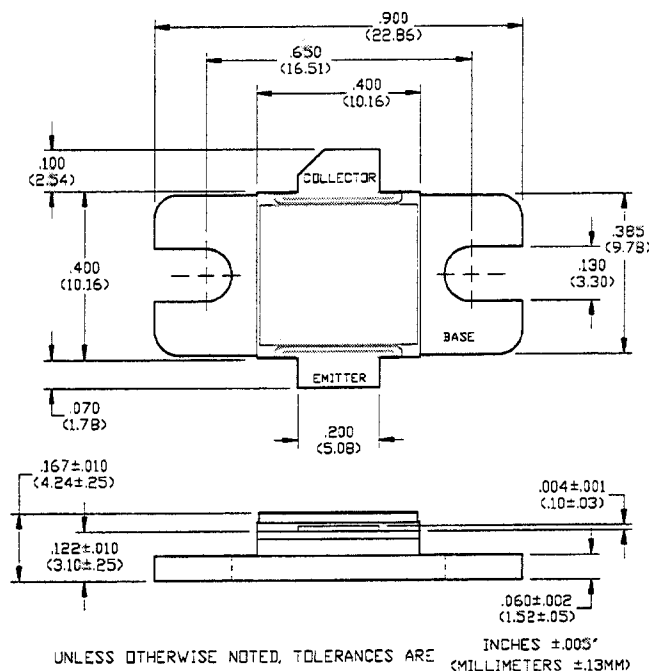


Electrical Characteristics at 25°C

Parameter	Symbol	Min	Max	Units	Test Conditions
Collector-Emitter Breakdown Voltage	BV_{CES}	65	-	V	$I_C=40$ mA
Collector-Emitter Leakage Current	I_{CES}	-	7.5	mA	$V_{CE}=40$ V
Thermal Resistance	$R_{TH(JC)}$	-	0.30	°C/W	$V_{CC}=36$ V, $P_{OUT}=90$ W, $F=3.1, 3.3, 3.5$ GHz
Input Power	P_{IN}	-	16.0	W	$V_{CC}=36$ V, $P_{OUT}=90$ W, $F=3.1, 3.3, 3.5$ GHz
Power Gain	G_P	7.5	-	dB	$V_{CC}=36$ V, $P_{OUT}=90$ W, $F=3.1, 3.3, 3.5$ GHz
Collector Efficiency	η_C	35	-	%	$V_{CC}=36$ V, $P_{OUT}=90$ W, $F=3.1, 3.3, 3.5$ GHz
Input Return Loss	RL	6	-	dB	$V_{CC}=36$ V, $P_{OUT}=90$ W, $F=3.1, 3.3, 3.5$ GHz
Load Mismatch Tolerance	VSWR-T	-	2:1	-	$V_{CC}=36$ V, $P_{OUT}=90$ W, $F=3.1, 3.3, 3.5$ GHz

Broadband Test Fixture Impedances

F(GHz)	$Z_{IF}(\Omega)$	$Z_{OF}(\Omega)$
3.10	8.9 - j11.2	5.2 - j11.0
3.30	8.7 - j8.6	4.2 - j8.8
3.50	8.6 - j6.0	4.7 - j7.0

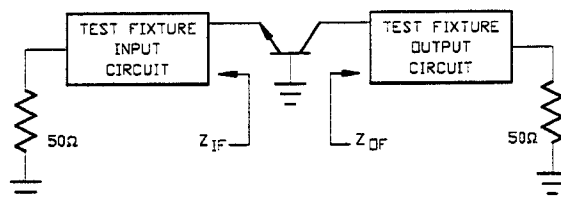

Specifications Subject to Change Without Notice.

9-260


M/A-COM, Inc.

North America: Tel. (800) 366-2266
Fax (800) 618-8883


■ Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

■ Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020

RF Test Fixture

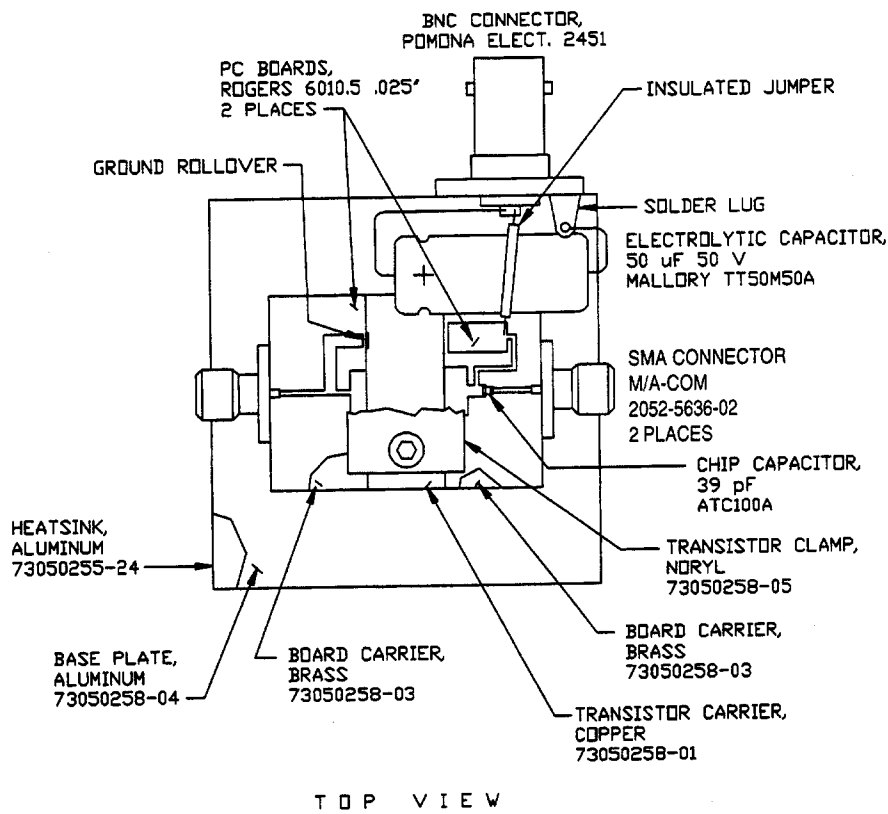

Test Fixture PC Board Dimensions

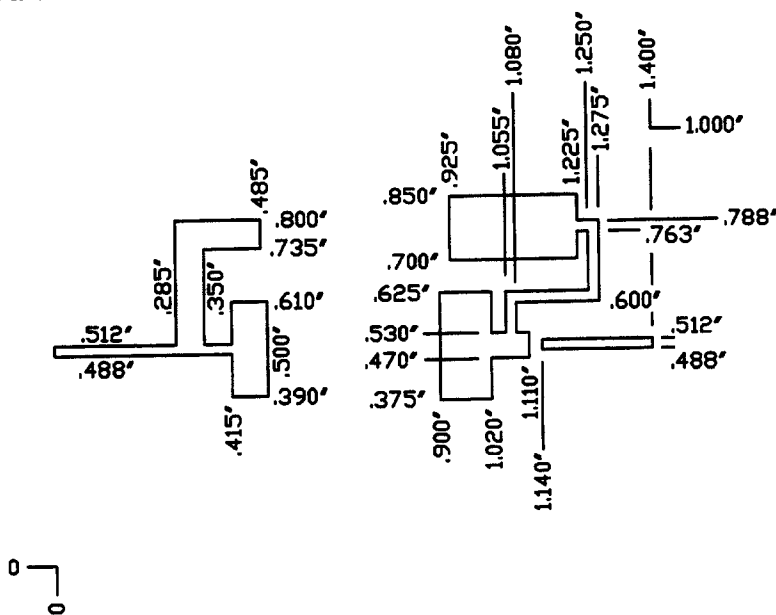

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

North America: Tel. (800) 366-2266
Fax (800) 618-8883

Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020

9-261